


# Termoline

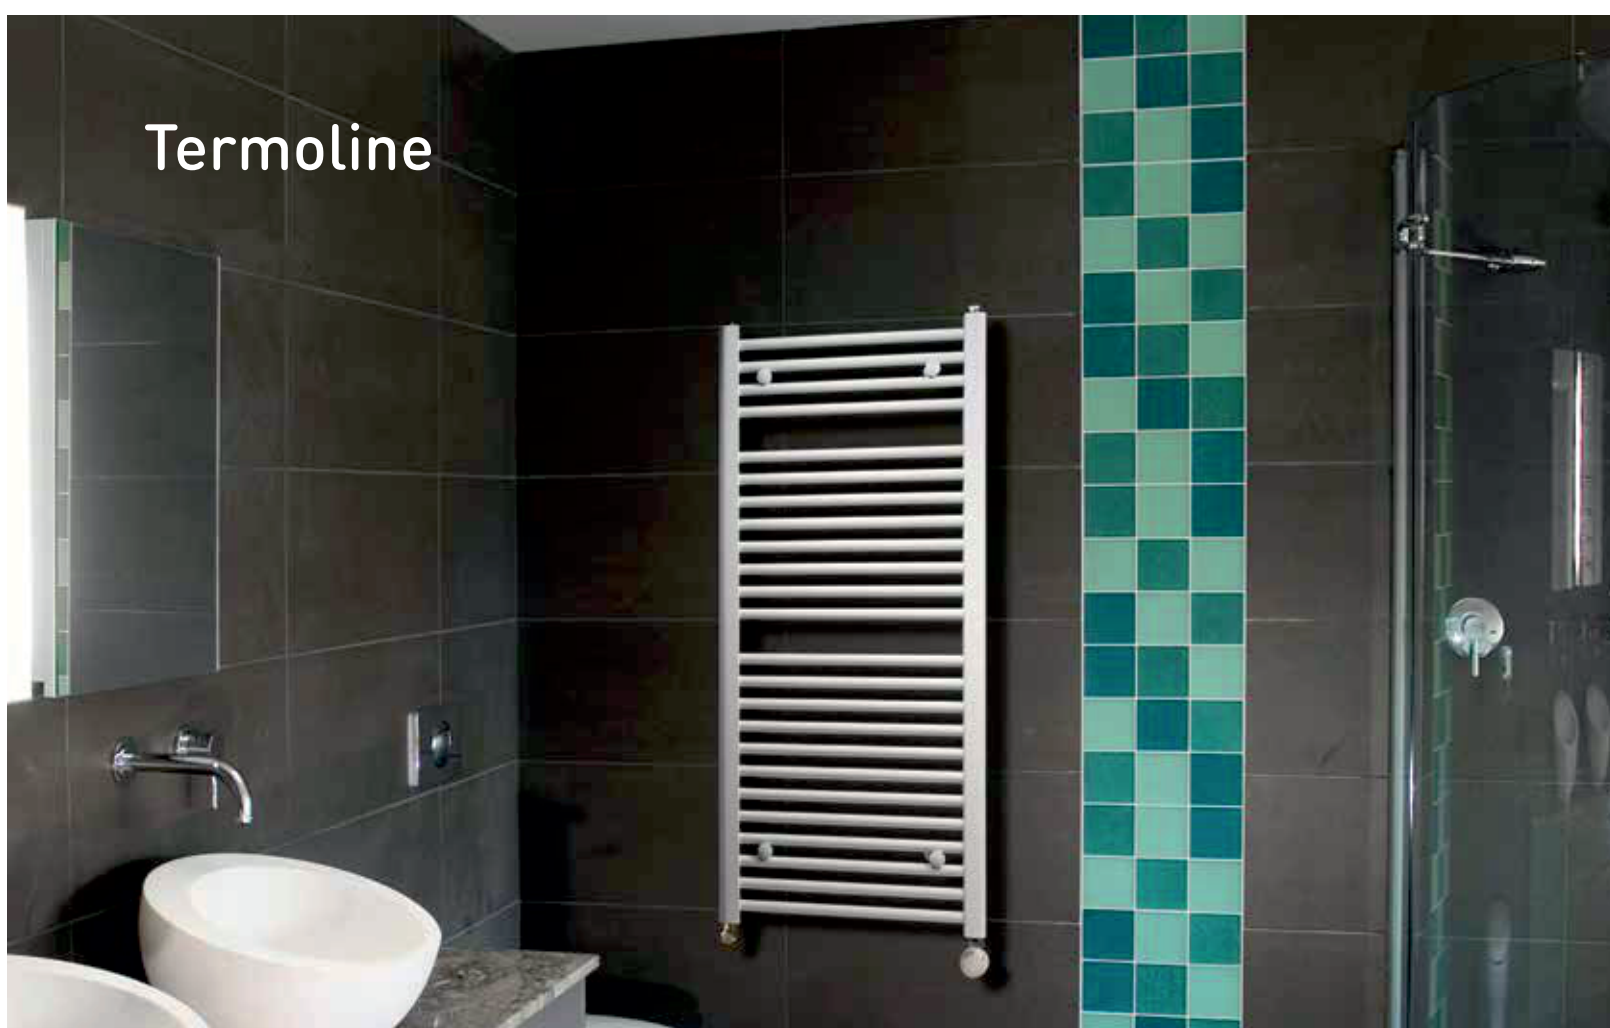

Test Pressure **13** bar


Max Working Pressure **10** bar

Max Water Temperature **110** °C

Paint Finish **9016** RAL

No of Connections **4x G 1/2"** DIN

- Elegant, efficient and durable tubular radiators
- Slim product design providing solutions in space restricted areas, such as bathrooms and kitchens
- Increased paint thickness for longer product life in bathrooms
- Wide range of straight and curved models providing flexibility in sizing
- White (RAL 9016) and chrome finish available as standard
- Comprehensive hardware pack including airvent & blind plugs, screws and screw caps
- Specially designed wall brackets providing hassle-free mounting
- Robust packaging ensuring long-lasting protection during transport and on-site
- Accessories available upon request

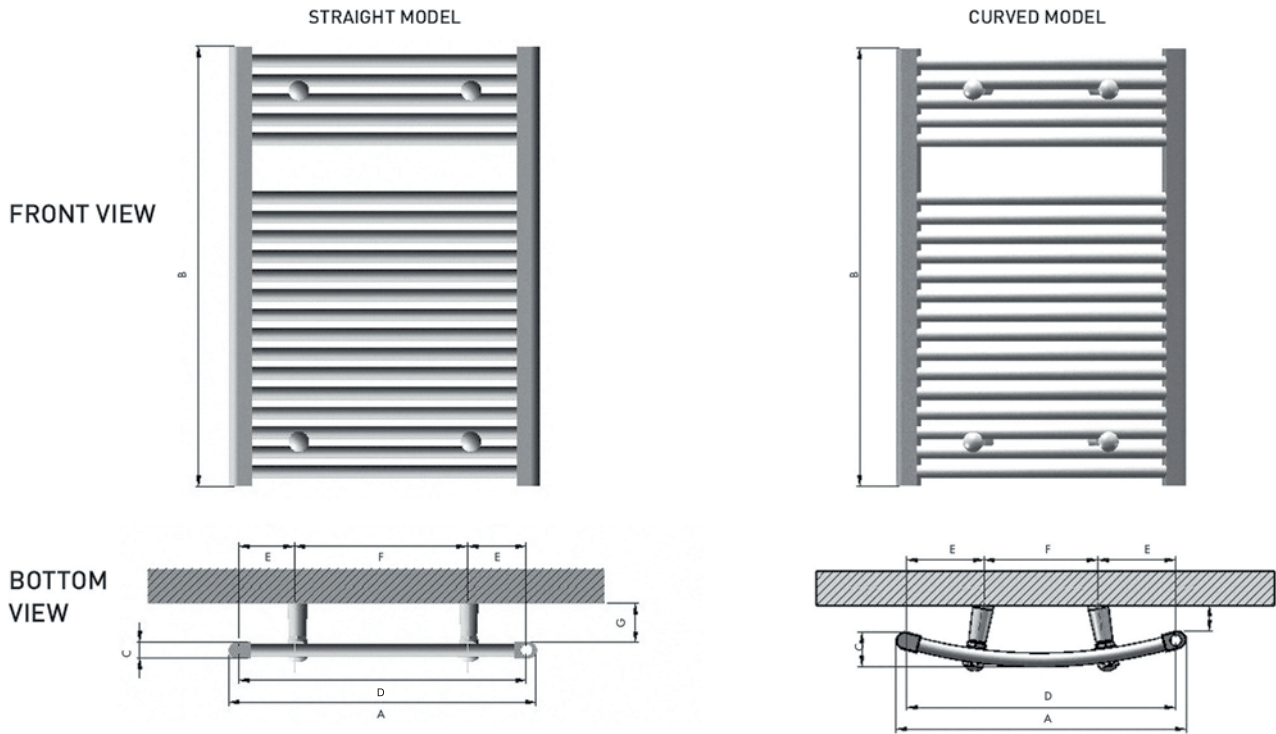

Type	A Width (mm)	B Height (mm)	C Depth (mm)	Installation positions				Inlet Distanc- ce (mm)	Num- ber of pipes (n)	Weight (kg)	Water capa- city (l)	Heat output @ 75/65/20°C		
				D (mm)	E (mm)	F (mm)	G (mm)					White RAL 9016	Chrome	
Straight	4/7	420	700	30	376	70	240	65-75	375	15	4,5	3,00	313	211
	4/9	420	900	30	376	70	240	65-75	375	18	5,7	3,79	375	252
	4/12	420	1200	30	376	70	240	65-75	375	25	7,6	5,10	494	328
	5/7	500	764	30	456	70	320	65-75	455	16	5,5	3,59	373	251
	6/7	600	764	30	556	70	420	65-75	555	16	6,3	4,07	438	294
	7/7	750	764	30	706	70	570	65-75	705	16	7,5	4,80	533	356
	5/11	500	1172	30	456	70	320	65-75	455	24	8,4	5,57	563	373
	6/11	600	1172	30	556	70	420	65-75	555	24	9,6	6,31	662	436
	7/11	750	1172	30	706	70	570	65-75	705	24	11,4	7,42	806	528
	5/17	500	1750	30	456	70	320	65-75	455	36	12,0	8,10	821	541
	6/17	600	1750	30	556	70	420	65-75	555	36	13,5	9,22	964	632
7/17	750	1750	30	706	70	570	65-75	705	36	15,6	10,90	1174	766	
Curved	4/7	418	700	42	374	110	160	40-45	373	15	4,5	3,00	313	211
	4/9	418	900	42	374	110	160	40-45	373	18	5,7	3,79	375	252
	4/12	418	1200	42	374	110	160	40-45	373	25	7,6	5,10	494	328
	5/7	500	764	60	452	110	240	40-45	455	16	5,5	3,59	373	251
	6/7	600	764	60	551	110	340	40-45	555	16	6,3	4,07	438	294
	7/7	750	764	60	703	110	490	40-45	705	16	7,5	4,80	533	356
	5/11	500	1172	60	452	110	240	40-45	455	24	8,4	5,57	563	373
	6/11	600	1172	60	551	110	340	40-45	555	24	9,6	6,31	662	436
	7/11	750	1172	60	703	110	490	40-45	705	24	11,4	7,42	806	528
	5/17	500	1750	60	452	110	240	40-45	455	36	12,0	8,10	821	541
	6/17	600	1750	60	551	110	340	40-45	555	36	13,5	9,22	964	632
	7/17	750	1750	60	701	110	490	40-45	705	36	15,6	10,90	1174	766