

# Churchill


When good things come in small packages. The Churchill cast iron radiator is a perfectly recreated timeless classic. One of the most compact cast iron radiators in Paladin's range, the Churchill is ideally suited to add a touch of vintage charm to low bay windows, conservatories and loft conversions. The Churchill may be one of the shortest of all the Paladin range, but it is hugely heat efficient as well as adding timeless elegance to any room.

**HEIGHT** (Please select your required height to view heat output and specifications)

**350**



CODE/ SECTIONS	LENGTH	OUTPUT				WEIGHT (KG)	WATER CONTENT (LTRs)
		Dt60		Dt50			
		BTUs	WATTS	BTUs	WATTS		
CHUR-350-03	221	1440	422	1136	333	22	3.30
CHUR-350-04	283	1919	563	1515	444	29	4.40
CHUR-350-05	345	2399	703	1894	555	36	5.50
CHUR-350-06	407	2879	844	2272	666	43	6.60
CHUR-350-07	469	3359	984	2651	777	50	7.70
CHUR-350-08	532	3839	1125	3030	888	58	8.80
CHUR-350-09	594	4319	1266	3409	999	65	9.90
CHUR-350-10	656	4799	1406	3787	1110	72	11.00
CHUR-350-11	718	5278	1547	4166	1221	79	12.10
CHUR-350-12	780	5758	1688	4545	1332	86	13.20
CHUR-350-13	843	6238	1828	4924	1443	94	14.30
CHUR-350-14	905	6718	1969	5302	1554	101	15.40
CHUR-350-15	967	7198	2110	5681	1665	108	16.50
CHUR-350-16	1029	7678	2250	6060	1776	115	17.60
CHUR-350-17	1091	8158	2391	6438	1887	122	18.70
CHUR-350-18	1154	8637	2531	6817	1998	130	19.80
CHUR-350-19	1216	9117	2672	7196	2109	137	20.90
CHUR-350-20	1278	9597	2813	7575	2220	144	22.00
CHUR-350-21	1340	10077	2953	7953	2331	151	23.10
CHUR-350-22	1402	10557	3094	8332	2442	158	24.20
CHUR-350-23	1465	11037	3235	8711	2553	166	25.30
CHUR-350-24	1527	11516	3375	9090	2664	173	26.40
CHUR-350-25	1589	11996	3516	9468	2775	180	27.50
CHUR-350-26	1651	12476	3657	9847	2886	187	28.60
CHUR-350-27	1713	12956	3797	10226	2997	194	29.70
CHUR-350-28	1776	13436	3938	10604	3108	202	30.80
CHUR-350-29	1838	13916	4078	10983	3219	209	31.90
CHUR-350-30	1900	14396	4219	11362	3330	216	33.00
CHUR-350-31	1962	14875	4360	11741	3441	223	34.10
CHUR-350-32	2024	15355	4500	12119	3552	230	35.20
CHUR-350-33	2087	15835	4641	12498	3663	238	36.30
CHUR-350-34	2149	16315	4782	12877	3774	245	37.40
CHUR-350-35	2211	16795	4922	13256	3885	252	38.50
CHUR-350-36	2273	17275	5063	13634	3996	259	39.60
CHUR-350-37	2335	17755	5204	14013	4107	266	40.70
CHUR-350-38	2398	18234	5344	14392	4218	274	41.80
CHUR-350-39	2460	18714	5485	14771	4329	281	42.90
CHUR-350-40	2522	19194	5625	15149	4440	288	44.00

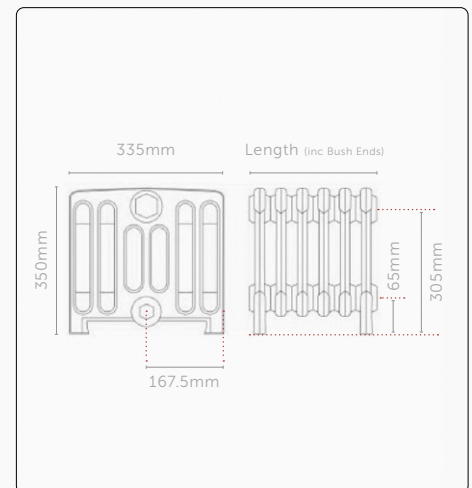

01205 280354

sales@paladinradiators.com

www.paladinradiators.com

Paladin Radiators, Langrick Road,  
New York, Lincolnshire LN4 4XH



Maximum test pressure = 3.3 bar | Maximum working pressure = 2.5 bar

Dt50 figures shown in accordance with BS EN442. We have, from experience, found that the Dt60 figures usually give adequate output without oversizing the radiators on standard heating systems. Maximum test pressure = 3.3 bar | Maximum working pressure = 2.5 bar. Lengths quoted are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline. Longer lengths are available on request.