



Design Radiators by ISAN

Collom

Collom radiators constitute a functional and architectural element of modern interiors. They are characterized by their simplicity and are available with optional print themes and several types of rails.



bath accessories
→ 143



connection sets
→ 144



colour ref. chart
→ 161





Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input Z heating rod, Mini ECO, Vision [W]	Power input Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric	Printed motif
DCLM 1500 0298	38	12,0	3,5	1,334	483	-	-	50	✓	-	✓
DCLM 1500 0450	38	17,9	5,2	1,334	731	-	-	50	✓	-	✓
DCLM 1500 0602	38	23,9	7,0	1,309	889	-	-	50	✓	-	✓
DCLM 1800 0298	38	14,0	4,1	1,358	593	-	-	50	✓	-	✓
DCLM 1800 0450	38	21,0	6,1	1,358	898	-	-	50	✓	-	✓
DCLM 1800 0602	38	27,5	7,9	1,309	992	-	-	50	✓	-	✓

For ordering procedure see page 162 / The weight of radiators does not include water and packaging


Technical information

Material	steel pipes Ø 28 mm steel profiles 70×11 mm
Connection threads	2xG1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	4, 6, 8

Modification options

Surface treatment	colour
Height range [mm]	500-2000 (increase of 10)
Length range [mm]	298-982 (increase of 76)
Change of dimensions	additional charge
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO

Type height (H) / length (L) [mm]

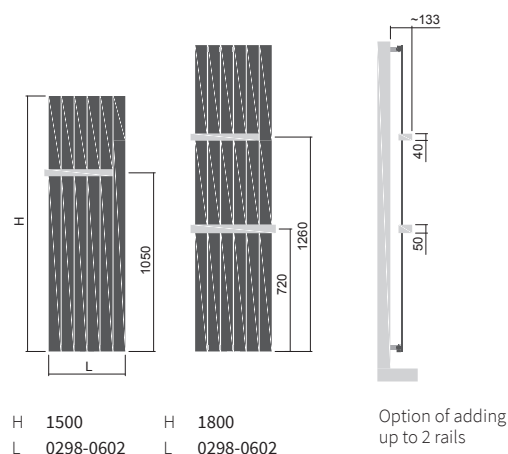


One rail is suitable for radiators installed 800 mm above the floor level and higher, while two rails 1 200 mm and higher.

Mounting


Type	X [mm]	A [mm]
Metal brackets	54-64	78-88

Connection options



The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.

Rails




One-sided brushed stainless steel rail

Length [mm]	Code
298	O15MN81-46
450	O15MN81-42
602	O15MN81-43

One-sided rail - painted RAL 9016

Length [mm]	Code
298	O15MN01-46
450	O15MN01-42
602	O15MN01-43



Two-sided brushed stainless steel rail

Length [mm]	Code
298	O15MN81-05
450	O15MN81-06
602	O15MN81-07

Two-sided polished stainless steel rail

Length [mm]	Code
298	O15MN87-05
450	O15MN87-06
602	O15MN87-07

Two-sided rail - painted RAL 9016

Length [mm]	Code
298	O15MN01-05
450	O15MN01-06
602	O15MN01-07

Painted rails are also available in colour variations as per the ISAN colour chart at an extra charge.