



Design Radiators by ISAN

Miro

The Miro radiator, featuring an open-profile design, represents the perfect blend of minimalistic design and practicality. With a choice of left or right orientation and several size options, it easily adapts to your specific space. Its modern, elegant construction offers the flexibility of both electric heating and connection to a central heating system. Simply put, the Miro is a stylish and functional addition to any modern bathroom.



bath accessories
→ 143




connection sets
→ 144



electric regulators
→ 154



colour ref. chart
→ 161

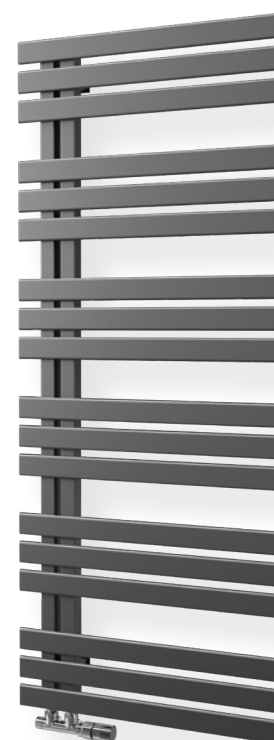



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input Z heating rod, Mini ECO, Vision [W]	Power input Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric
DMIR 0972 0500	45	11,0	3,9	1,348	395	400	400	50	✓	✓
DMIR 0972 0600	45	12,5	4,3	1,348	446	400	400	50	✓	✓
DMIR 1236 0500	45	13,8	5,0	1,348	496	500	400	50	✓	✓
DMIR 1236 0600	45	15,7	5,5	1,348	560	600	600	50	✓	✓
DMIR 1500 0500	45	16,6	6,0	1,323	602	600	600	50	✓	✓
DMIR 1500 0600	45	18,9	6,6	1,323	680	700	600	50	✓	✓
DMIR 1764 0500	45	19,4	7,0	1,298	697	700	600	50	✓	✓
DMIR 1764 0600	45	22,1	7,7	1,298	787	800	800	50	✓	✓

For ordering procedure see page 162 / The weight of radiators does not include water and packaging / For the version of the body for the central heating system with SK connection, it is not necessary to define a left or right design. / For the electro-left design, the code must be changed to DMIL.


Technical information

Material	steel profiles 35×35 mm
	steel profiles 50×10 mm
Connection threads	4×G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110°C
Number of profiles	12, 15, 18, 21

Modification options

Surface treatment	colour
Height range [mm]	708-1764 (increase of 264)
Length range [mm]	NO
Change of dimensions	additional charge
Electric version	YES (additional charge) (code DMIR, DMIL)
Standard connection (SK)	STANDARD (code DMIR-left and right design)
Middle connection (SM)	NO
Side connection (SB)	NO
One-sided into space fixing	NO

Type height (H) / length (L) [mm]

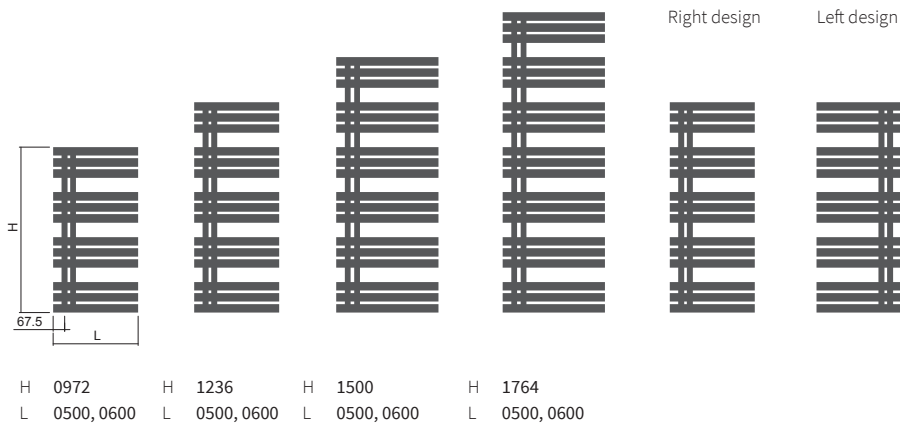

Mounting

	Z	B	X	A
Type			X [mm]	A [mm]
Metal brackets			58-68	90-100

Connection options

Left design



Right design



The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.