



Design Radiators by ISAN

Octava Double

One of the highest performing radiators, ideal for lobbies, kitchens and other spacious indoor areas. It combines modern design with high efficiency for optimal thermal comfort.




bath accessories
→ 143



connection sets
→ 144



colour ref. chart
→ 161

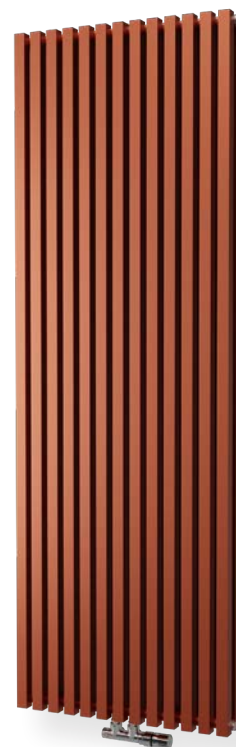

Octava Double



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input Z heating rod, Mini ECO, Vision [W]	Power input Rio, Neo, Vivo [W]	Connection span (Z) [mm]	White colour RAL 9016	Electric
DOCD 1800 0318	86	36,0	18,6	1,284	1181	-	-	50	✓	-
DOCD 1800 0462	86	51,3	26,5	1,284	1654	-	-	50	✓	-
DOCD 1800 0606	86	66,7	34,6	1,284	2093	-	-	50	✓	-

For ordering procedure see page 162 / The weight of radiators does not include water and packaging


Technical information

Material	steel pipes Ø 28 mm
	steel profiles 30×30 mm
Connection threads	2xG1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110°C
Number of profiles	14, 20, 26

Modification options

Surface treatment	colour
Height range [mm]	600-2000 (increase of 10)
Length range [mm]	318-606 (increase of 48)
Change of dimensions	additional charge
Electric version	NO
Middle connection (SM)	STANDARD
Side connection (SB)	YES (additional charge)
One-sided into space fixing	NO


Type height (H) / length (L) [mm]

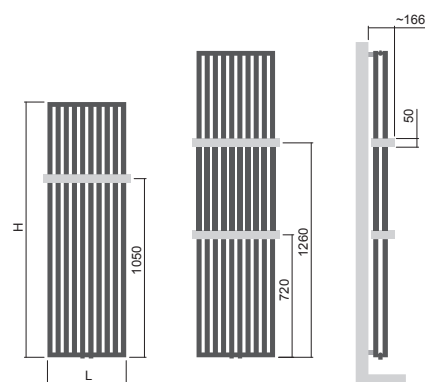

H 1500	H 1800
L 0318-0606	L 0318-0606


Option of adding up to 2 rails. One rail is suitable for radiators installed 800 mm above the floor level and higher, while two rails 1 200 mm and higher. The two-sided rails must be installed on the radiator prior to mounting it on the wall.

Mounting




Type	X [mm]	A [mm]
Metal brackets	83-93	126-136

Connection options



The type of connection must be specified in the order; for more information see page 162, positions 13 and 14.

Rails



Two-sided brushed stainless steel rail

Length [mm]	Code
318	O15MN81-17
462	O15MN81-18
606	O15MN81-19

Two-sided polished stainless steel rail

Length [mm]	Code
318	O15MN87-17
462	O15MN87-18
606	O15MN87-19

Two-sided rail - painted RAL 9016

Length [mm]	Code
318	O15MN01-17
462	O15MN01-18
606	O15MN01-19

Painted rails are also available in colour variations as per the ISAN colour chart at an extra charge.